

GPU SuperServer ARS-111GL-NHR-LCC

NVIDIA GH200 Grace Hopper Superchip system with liquid-cooling supporting NVIDIA BlueField-3 or NVIDIA ConnectX-7



More details here

Key Applications

High Performance Computing, AI/Deep Learning Training and Inference, Large Language Model (LLM) and Generative AI,


Key Features

- High density 1U GPU system with Integrated NVIDIA® H100 GPU and liquid cooling;
- NVIDIA Grace Hopper™ Superchip (Grace CPU and H100 GPU);
- NVLink® Chip-2-Chip (C2C) high-bandwidth, low-latency interconnect between CPU and GPU at 900GB/s;
- Up to 576GB of coherent memory per node including 480GB LPDDR5X and 96GB of HBM3 for LLM applications;
- 2x PCIe 5.0 x16 slots supporting NVIDIA BlueField®-3 or ConnectX®-7;
- 7 Hot-Swap Heavy Duty Fans with Optimal Fan Speed Control;
- This system supports two E1.S drives directly from the processor only.;



Form Factor	1U Rackmount Enclosure: 440 x 44 x 940mm (17.33" x 1.75" x 37") Package: 1219 x 241 x 711mm (48" x 9.5" x 28")
Processor	NVIDIA 72-core NVIDIA Grace CPU on GH200 Grace Hopper™ Superchip
GPU	Max GPU Count: Up to 1 onboard GPU(s) Supported GPU: NVIDIA: H100 Tensor Core GPU on GH200 Grace Hopper™ Superchip (Liquid-cooled) CPU-GPU Interconnect: NVLink®-C2C
System Memory	Slot Count: Onboard Memory Max Memory: Up to 480GB ECC LPDDR5X Additional GPU Memory: Up to 96GB ECC HBM3
Drive Bays Configuration	Default: Total 8 bay(s) <ul style="list-style-type: none"> • 8 front hot-swap E1.S NVMe drive bay(s) M.2: 2 M.2 NVMe slot(s) (M-key)
Expansion Slots	Default <ul style="list-style-type: none"> • 2 PCIe 5.0 x16 FHFL slot(s)
On-Board Devices	System on Chip
Input / Output	LAN: 1 RJ45 1 GbE Dedicated IPMI LAN port(s) Video: 1 mini-DP port(s)

(Front View – System)

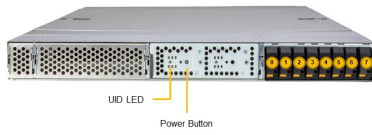

Drive Bay	Description
0 - 7	8 Hot-swap EDSFF E1 S Drive Bays

System Cooling	Fans: 9 Removable heavy-duty 4cm Fan(s) Liquid Cooling: Direct to Chip (D2C) Cold Plate (optional)
Power Supply	2x 2000W Redundant Titanium Level (96%) power supplies
System BIOS	BIOS Type: AMI 64MB SPI Flash EEPROM
PC Health Monitoring	CPU: Monitors for CPU Cores, Chipset Voltages, Memory FAN: Fans with tachometer monitoring Status monitor for speed control Pulse Width Modulated (PWM) fan connectors Temperature: Monitoring for CPU and chassis environment Thermal Control for fan connectors
Dimensions and Weight	Weight: Gross Weight: 65.5 lbs (29.7 kg) Net Weight: 48.5 lbs (22 kg) Available Color: Silver
Operating Environment	Operating Temperature: 10°C ~ 35°C (50°F ~ 95°F) Non-operating Temperature: -40°C to 60°C (-40°F to 140°F) Operating Relative Humidity: 8% to 90% (non-condensing) Non-operating Relative Humidity: 5% to 95% (non-condensing)
Motherboard	Super G1SMH-G
Chassis	CSE-GP102TS-R000NDFP