

Storage SuperServer SSG-620P-ACR16L

2U front-loading storage server with 16 hot-swap 3.5" hybrid SAS/SATA bays and PCIe 4.0



More details here

Key Applications


Enterprise Server, iSCSI SAN, HPC, Data Center, Database Processing & Storage, Corporate Database,

Key Features

- Dual Socket P+ (LGA-4189) 3rd Gen Intel® Xeon® Scalable Processors;
- 16 ECC DDR4-3200: LRDIMM/RDIMM + 2 Intel® Optane™ Persistent Memory Dedicated Slots;
- 2x 10Gbe;
- 16x 3.5" hot-swap hybrid SATA/SAS drive bays (4 NVMe Hybrid Ports); 2 Rear SATA Slots; onboard 1 M.2 NVMe;
- 3 heavy duty fans with optimal fan speed control; 1 Air Shroud;
- 1600W Redundant Power Supplies Titanium Level (96%);
- Broadcom® 3816 Controller;



| | |
|---------------------------------|---|
| Form Factor | 2U Rackmount Enclosure: 437 x 89 x 705mm (17.2" x 3.5" x 27.75") Package: 658 x 274 x 998mm (25.9" x 10.8" x 39.3") |
| Processor | Dual Socket P+ (LGA-4189) 3rd Gen Intel® Xeon® Scalable processors Up to 38C/76T; Up to 57MB Cache per CPU |
| System Memory | Slot Count: 16 DIMM slots Max Memory (2DPC): Up to 4TB 3200MT/s ECC DDR4 |
| Drive Bays Configuration | Default: Total 18 bay(s) <ul style="list-style-type: none"> • 8 front hot-swap 3.5" SAS/SATA drive bay(s) • 4 internal hot-swap 3.5" SAS/SATA drive bay(s) • 4 front hot-swap 3.5" NVMe*/SAS/SATA drive bay(s) • 2 rear hot-swap 2.5" SAS*/SATA drive bay(s) (*NVMe/SAS support may require additional storage controller and/or cables, please see the optional parts list for details) M.2: 1 M.2 NVMe slot(s) (M-key) |
| Expansion Slots | Default <ul style="list-style-type: none"> • 4 PCIe 4.0 x16 LP slot(s) • 1 PCIe 4.0 x8 LP slot(s) |
| On-Board Devices | Chipset: Intel® C621A Network Connectivity: 2 RJ45 10GBASE-T with Intel® X550 |
| Input / Output | LAN: 1 RJ45 1 GbE Dedicated IPMI LAN port(s) 2 RJ45 10 GBASE-T LAN port(s) USB: 4 USB 3.0 port(s) (rear) Video: 1 VGA port(s) DOM: 2 SuperDOM (Disk on Module) port(s) |

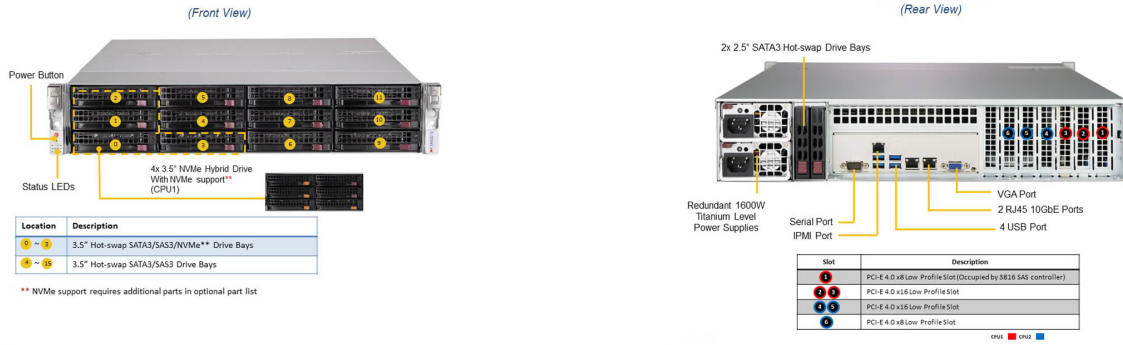

| | |
|-----------------------|---|
| System Cooling | Fans: 4 Heavy Duty 8cm Fan(s) |
| Power Supply | 2x 1600W Redundant Titanium Level (96%) Hot-plug power supplies |
| System BIOS | BIOS Type: AMI 128MB SPI Flash EEPROM |
| Management | SuperCloud Composer; Supermicro Server Manager (SSM); Supermicro Update Manager (SUM); Supermicro SuperDoctor® 5 (SD5); Super Diagnostics Offline (SDO); Supermicro Thin-Agent Service (TAS); SuperServer Automation Assistant (SAA) New! |
| PC Health Monitoring | CPU: Monitors for CPU Cores, Chipset Voltages, Memory 4+1 Phase-switching voltage regulator FAN: Fans with tachometer monitoring Status monitor for speed control Pulse Width Modulated (PWM) fan connectors Temperature: Monitoring for CPU and chassis environment Thermal Control for fan connectors |
| Dimensions and Weight | Weight: Gross Weight: 62 lbs (28.12 kg) Net Weight: 41.5 lbs (18.82 kg) Available Color: Black |
| Operating Environment | RoHS Compliant Operating Temperature: 10°C ~ 35°C (50°F ~ 95°F) Non-operating Temperature: -40°C to 60°C (-40°F to 140°F) Operating Relative Humidity: 8% to 90% () Non-operating Relative Humidity: 5% to 95% () |
| Motherboard | <u>Super X12DPI-NT6</u> |
| Chassis | <u>CSE-829HE1C4-R1K62LPB</u> |