

UP SuperServer SYS-510T-ML

1U UP short-depth mainstream server




More details here

Key Applications

General Purpose, Entry Appliance, Front-end, Web Hosting,

Key Features

- Single Socket H5 (LGA-1200) supports Intel® Xeon® E-2300 series, Intel® Pentium® processors;
- 4 DIMMs; Up to 128GB of DDR4 ECC UDIMM memory with speeds of up to 3200MHz;
- 1 PCIe 4.0 x8 (in x16 FHHL);
- Intel® Ethernet Controller i210 2x 1GbE RJ45;
- Single Platinum 350W Power Supply;

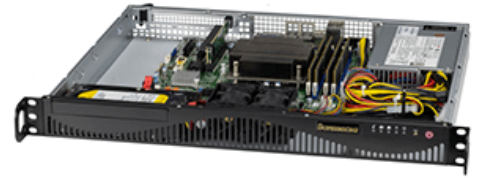


Form Factor	<p>Mini-1U Rackmount</p> <p>Enclosure: 437 x 43 x 368mm (17.2" x 1.7" x 14.5")</p> <p>Package: 559 x 160 x 508mm (22" x 6.3" x 20")</p>
Processor	<p>Single Socket H5 (LGA-1200)</p> <p>Intel® Xeon® E-2300 series Processors and 10th Gen. Pentium® Processors</p> <p>Up to 8C/16T; Up to 16MB Cache</p>
System Memory	<p>Slot Count: 4 DIMM slots</p> <p>Max Memory (2DPC): Up to 128GB 3200MT/s ECC DDR4 UDIMM</p>
Drive Bays Configuration	<p>Default: Total 1 bay(s)</p> <ul style="list-style-type: none"> • 1 internal fixed 3.5" SATA drive bay(s) <p>Option A: Total 2 bay(s)</p> <ul style="list-style-type: none"> • 2 internal fixed 3.5" SATA* drive bay(s) <p>Option B: Total 3 bay(s)</p> <ul style="list-style-type: none"> • 3 internal fixed 2.5" SATA* drive bay(s) <p>(*SATA support may require additional storage controller and/or cables, please see the optional parts list for details)</p> <p>M.2: 1 M.2 PCIe 3.0 x4 NVMe slot(s) (M-key 2280/22110)</p>
Expansion Slots	<p>Default</p> <ul style="list-style-type: none"> • 1 PCIe 4.0 x8 (in x16) FHHL slot(s)
On-Board Devices	<p>SATA: SATA (6Gbps) ; RAID 0/1/5/10 support</p> <p>Chipset: Intel® C252</p> <p>Network Connectivity: 2 RJ45 1GbE with Intel® I210</p>
Input / Output	<p>LAN: 2 RJ45 1 GbE LAN port(s)</p> <ul style="list-style-type: none"> 1 RJ45 1 GbE Dedicated BMC LAN port(s) (IPMI shared on LAN port 1) <p>USB: 2 USB 2.0 port(s) (header)</p> <ul style="list-style-type: none"> 2 USB 3.2 Gen1 Type-A port(s) (rear) 2 USB 2.0 Type-A port(s) (rear) 2 USB 3.2 Gen1 port(s) (Header) 1 USB 3.2 Gen1 Type-A port(s) (Header) <p>Video: 1 VGA port(s)</p> <p>Serial: 1 COM port(s) (Rear)</p> <ul style="list-style-type: none"> 1 COM port(s) (Header) <p>DOM: 2 SuperDOM (Disk on Module) port(s) with built-in power</p> <p>TPM: 1 TPM header</p>

(Front View – System)



(Rear View – System)

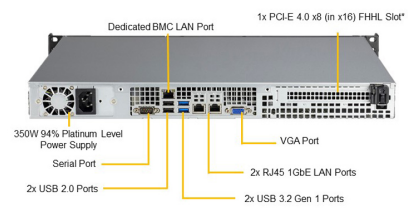

* Pentium CPUs provide PCIe 3.0 only

System Cooling	Fans: 2 counter-rotation PWM 40x40x56mm Fan(s)
Power Supply	1x 350W Platinum Level (93%) power supply
System BIOS	BIOS Type: AMI 32MB SPI Flash EEPROM
Management	SuperCloud Composer; Supermicro Server Manager (SSM); Supermicro Update Manager (SUM); Supermicro SuperDoctor® 5 (SD5); Super Diagnostics Offline (SDO); Supermicro Thin-Agent Service (TAS); SuperServer Automation Assistant (SAA) New!
PC Health Monitoring	CPU: Monitors for CPU Cores, Chipset Voltages, Memory 6 + 1 Phase-switching voltage regulator FAN: Fans with tachometer monitoring Status monitor for speed control Pulse Width Modulated (PWM) fan connectors Temperature: Monitoring for CPU and chassis environment Thermal Control for fan connectors
Dimensions and Weight	Weight: Gross Weight: 14 lbs (6.35 kg) Net Weight: 11 lbs (4.99 kg) Available Color: Black
Operating Environment	Operating Temperature: 10°C ~ 35°C (50°F ~ 95°F) Non-operating Temperature: -40°C to 70°C (-40°F to 158°F) Operating Relative Humidity: 8% to 90% (non-condensing) Non-operating Relative Humidity: 5% to 95% (non-condensing)
Motherboard	<u>Super X12STL-F</u>
Chassis	<u>CSE-512F-350B1</u>