

UP SuperServer SYS-521C-NR

2U UP CloudDC with 12 hot-swap 3.5" SAS/SATA (2 NVMe hybrid) bays and 6 PCIe 5.0 slots + 1 PCIe 5.0 AIOM slot



More details here

Key Applications



Cloud Computing, Data Center Optimized, Network Appliance, AI inferencing, ML training, Database/Storage,

Key Features

- Single Socket E (LGA-4677) 4th/5th Gen Intel® Xeon® Scalable processors. Up to 350W TDP;
- Intel® C741 Chipset;
- 16 DIMMs; Supports 3DS DDR5 RDIMM. Up to 5600 MHz;
- Single AIOM with NCSI (OCP 3.0) for networking, 1 dedicated IPMI LAN;
- 12x front hot-swap 3.5" SATA3 drive bays (Optional 2 hybrid Gen5 NVMe), SAS3 with additional SAS controller card;
- Redundant Titanium 1200W Power Supplies;



Form Factor	2U Rackmount Enclosure: 437 x 89 x 648mm (17.2" x 3.5" x 25.5") Package: 678 x 290 x 876mm (26.7" x 11.4" x 34.5")
Processor	Single Socket E (LGA-4677) 5th Gen Intel® Xeon® / 4th Gen Intel® Xeon® Scalable processors Up to 64C/128T; Up to 320MB Cache
GPU	Max GPU Count: Up to 2 double-width or 4 single-width GPU(s) Supported GPU: NVIDIA PCIe: H100, L40, T1000, RTX A6000, RTX A4000, RTX A2000, L40S, L4, A40, A30, A16, A2 CPU-GPU Interconnect: PCIe 5.0 x16 CPU-to-GPU Interconnect
System Memory	Slot Count: 16 DIMM slots/8 Channels Max Memory (1DPC): Up to 2TB 5600MT/s ECC DDR5 RDIMM Max Memory (2DPC): Up to 4TB 4400MT/s ECC DDR5 RDIMM
Drive Bays Configuration	Default: Total 12 bay(s) <ul style="list-style-type: none"> • 10 front hot-swap 3.5" SAS*/SATA drive bay(s) • 2 front hot-swap 3.5" PCIe 5.0 NVMe*/SAS*/SATA drive bay(s) (*NVMe/SAS support may require additional storage controller and/or cables, please see the optional parts list for details) M.2: 2 M.2 PCIe 3.0 x2 NVMe/SATA slot(s) (M-key 2280/22110)
Expansion Slots	Default <ul style="list-style-type: none"> • 4 PCIe 5.0 x8 FHFL slot(s) • 2 PCIe 5.0 x16 FHHL slot(s) • 1 PCIe 5.0 x16 AIOM slot(s) (OCP 3.0 compatible) Option A <ul style="list-style-type: none"> • 2 PCIe 5.0 x16 FHFL double-width slot(s) • 2 PCIe 5.0 x16 FHHL slot(s) • 1 PCIe 5.0 x16 AIOM slot(s) (OCP 3.0 compatible)
On-Board Devices	SATA: SATA (6Gbps) ; RAID 0/1/5/10 support NVMe: NVMe; RAID 0/1/5/10 support(Intel® VROC RAID key required) Chipset: Intel® C741 Network Connectivity: Via AIOM
Input / Output	LAN: 1 RJ45 1 GbE Dedicated BMC LAN port(s) USB: 2 USB 2.0 port(s) (header) 2 USB 3.2 Gen1 Type-A port(s) (rear) Video: 1 VGA port(s) Serial: 1 COM port(s) (Rear) TPM: 1 TPM header

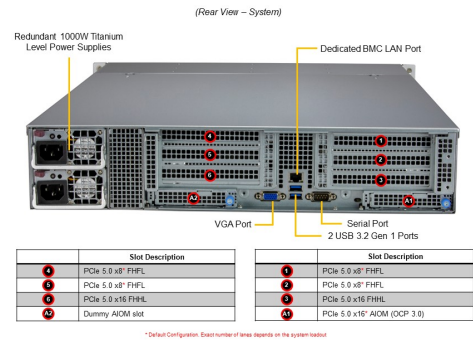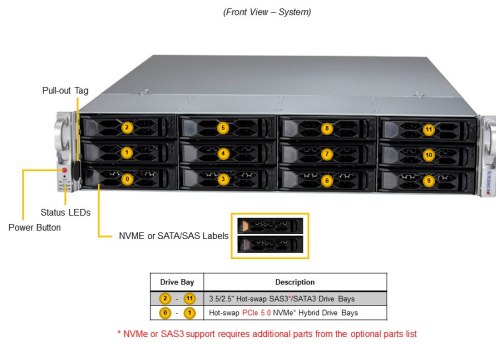

System Cooling	Fans: 3 heavy duty PWM 80x80x38mm Fan(s)
Power Supply	2x 1200W Redundant (1 + 1) Titanium Level (96%) power supplies
System BIOS	BIOS Type: AMI 32MB SPI Flash EEPROM
Management	SuperCloud Composer; Supermicro Server Manager (SSM); Supermicro Update Manager (SUM); Supermicro SuperDoctor® 5 (SD5); Super Diagnostics Offline (SDO); Supermicro Thin-Agent Service (TAS); SuperServer Automation Assistant (SAA) New!
PC Health Monitoring	CPU: Monitors for CPU Cores, Chipset Voltages, Memory 8 Phase-switching voltage regulator FAN: Fans with tachometer monitoring Status monitor for speed control Pulse Width Modulated (PWM) fan connectors Temperature: Monitoring for CPU and chassis environment Thermal Control for fan connectors
Dimensions and Weight	Weight: Gross Weight: 59 lbs (26.76 kg) Net Weight: 33 lbs (15 kg) Available Color: Black front & silver body
Operating Environment	Operating Temperature: 10°C ~ 35°C (50°F ~ 95°F) Non-operating Temperature: -30°C to 60°C (-22°F to 140°F) Operating Relative Humidity: 8% to 80% (non-condensing) Non-operating Relative Humidity: 8% to 90% (non-condensing)
Motherboard	Super X13SEDW-F
Chassis	CSE-LA26TS-R1K23AWP1