

# Mainstream SuperServer SYS-741P-TR

DP 4U rackmount tower workstation with 1GbE for virtualization and enterprise server applications



More details here

## Key Applications



Virtualization, Enterprise Server, Application and data serving, Compute Intensive Applications,

## Key Features

- Dual Socket E (LGA-4677) 5th/4th Gen Intel® Xeon® Scalable processors, supports up to 300W TDP;
- 16 DIMM slots, Up to 4TB DDR5-5600MHZ/4800MHz ECC Registered RDIMM;
- 4 PCIe 5.0 x16 full height slot(s), 2 PCIe 5.0 x8 full height slot(s);
- 1200W Redundant Titanium level Power Supplies;



<b>Form Factor</b>	Tower/4U Rackmount Enclosure: 178 x 452 x 647mm (7" x 17.8" x 25.5") Package: 356 x 625 x 795mm (14" x 24.6" x 31.3")
<b>Processor</b>	Dual Socket E (LGA-4677) 5th Gen Intel® Xeon® / 4th Gen Intel® Xeon® Scalable processors
<b>System Memory</b>	Slot Count: 16 DIMM slots Max Memory (1DPC): Up to 4TB 5600MT/s ECC DDR5 RDIMM
<b>Drive Bays Configuration</b>	Default: Total 8 bay(s) <ul style="list-style-type: none"> <li>• 4 front hot-swap 3.5" NVMe*/SAS*/SATA drive bay(s)</li> <li>• 4 front hot-swap 3.5" SAS*/SATA drive bay(s)</li> </ul> Option A: Total 8 bay(s) <ul style="list-style-type: none"> <li>• 4 front hot-swap 2.5" NVMe*/SAS*/SATA drive bay(s)</li> <li>• 4 front hot-swap 2.5" SAS*/SATA drive bay(s)</li> </ul> (*NVMe/SAS support may require additional storage controller and/or cables, please see the optional parts list for details) M.2: 2 M.2 NVMe slot(s) (M-key) Peripheral Bays: 3 5.25" DVD bay(s) (optional)
<b>Expansion Slots</b>	PCI-Express (PCIe) Configuration: Default <ul style="list-style-type: none"> <li>• 2 PCIe 5.0 x8 FHFL slot(s)</li> <li>• 4 PCIe 5.0 x16 FHFL slot(s)</li> </ul> M.2: 2 M.2 PCIe 4.0 x2 NVMe slot(s) (M-key)
<b>On-Board Devices</b>	SATA: SATA (6Gbps) Chipset: Intel® C741 Network Connectivity: 2 RJ45 1GbE
<b>Input / Output</b>	LAN: 1 RJ45 1 GbE Dedicated BMC LAN port(s) USB: 2 USB 3.0 port(s) (front) 4 USB 3.0 port(s) (rear) Video: 1 VGA port(s) Serial: 1 COM port(s) (Rear) DOM: 2 SuperDOM (Disk on Module) port(s) TPM: 1 TPM Onboard/port 80

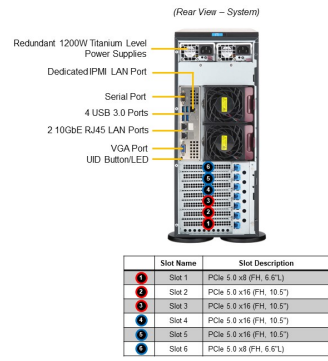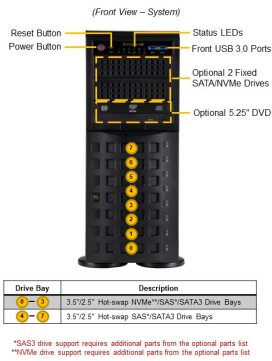

System Cooling	Fans: 3 middle Fan(s) 2 rear Fan(s)
Power Supply	1x 1200W Redundant Titanium Level (96%) power supply
System BIOS	BIOS Type: AMI 32MB SPI Flash EEPROM
Management	SuperCloud Composer; Supermicro Server Manager (SSM); Supermicro Update Manager (SUM); Supermicro SuperDoctor® 5 (SD5); Super Diagnostics Offline (SDO); Supermicro Thin-Agent Service (TAS); SuperServer Automation Assistant (SAA) New!
PC Health Monitoring	CPU: Monitors for CPU Cores, Chipset Voltages, Memory FAN: Fans with tachometer monitoring Status monitor for speed control Pulse Width Modulated (PWM) fan connectors Temperature: Monitoring for CPU and chassis environment Thermal Control for fan connectors
Dimensions and Weight	Weight: Gross Weight: 73.5 lbs (33.9 kg) Net Weight: 56 lbs (25.9 kg) Available Color: Black
Operating Environment	RoHS Compliant Operating Temperature: 10°C ~ 35°C (50°F ~ 95°F) Non-operating Temperature: -30°C to 60°C (-40°F to 140°F) Operating Relative Humidity: 8% to 80% (non-condensing) Non-operating Relative Humidity: 8% to 90% (non-condensing)
Motherboard	<a href="#">Super X13DEI</a>
Chassis	CSE-745BTS-R1K23BP