

# SuperWorkstation SYS-751GE-TNRT

DP rackmount tower 4-GPU workstation with closed-loop liquid cooling



More details here

## Key Applications

High Performance Computing, Engineering/scientific research, AI/Deep Learning Training,

## Key Features

- Acoustically optimized for quiet operation;
- 5th/4th Gen Intel® Xeon® Scalable processor support;
- Intel® C741 Chipset;
- 6 PCIe 5.0 x16;
- 8x 2.5" peripheral drive bays  
Up to 8x NVMe SSD support;
- Closed-loop liquid cooling for CPUs and GPUs;
- Supports up to four liquid-cooled GPUs;



Form Factor	Tower or 5U Rackmount Enclosure: 454.7 x 218.4 x 701mm (17.9" x 8.6" x 27.6") Package: 388 x 655 x 956mm (15.3" x 25.8" x 37.6")
Processor	Dual Socket E (LGA-4677) 5th Gen Intel® Xeon® / 4th Gen Intel® Xeon® Scalable processors Up to 64C/128T; Up to 320MB Cache per CPU
GPU	Max GPU Count: Up to 4 double-width GPU(s) Supported GPU: NVIDIA PCIe: A100 CPU-GPU Interconnect: PCIe 4.0 x16 CPU-to-GPU Interconnect GPU-GPU Interconnect: NVIDIA® NVLink® Bridge (optional)
System Memory	Slot Count: 16 DIMM slots Max Memory (1DPC): Up to 2TB 5600MT/s ECC DDR5 RDIMM
Drive Bays Configuration	Default: Total 8 bay(s) <ul style="list-style-type: none"> <li>• 8 front hot-swap 2.5" NVMe/SAS*/SATA drive bay(s)</li> </ul> (*SAS support may require additional storage controller and/or cables, please see the optional parts list for details) M.2: 2 M.2 NVMe slot(s) (M-key 2280/22110)
Expansion Slots	Default <ul style="list-style-type: none"> <li>• 6 PCIe 5.0 x16 FHFL slot(s)</li> </ul>
On-Board Devices	SATA: SATA (6Gbps) ; RAID 0/1/5/10 support Chipset: Intel® C741 Network Connectivity: 2 RJ45 10GbE with Intel® X550-AT2 1 RJ45 1GbE with ASPEED AST2600 1 SFP28 25GbE (optional)
Input / Output	LAN: 1 RJ45 1 GbE Dedicated IPMI LAN port(s) 2 RJ45 10 GbE LAN port(s) USB: 2 USB 3.2 Gen1 port(s) (front) 3 USB 3.2 Gen1 port(s) (rear) 1 USB 3.2 Gen2 port(s) (rear) Video: 1 VGA port(s) DOM: 2 SATA <a href="#">DOM</a> (Disk on Module) port(s) Audio: 7.1 HD Audio Line Out




(Front View – System)



Drive Bay	Description
	2.5" Hot-swap NVMe/SATA3 SSD drive bays (default SAS3 supported with optional add-on card and cables)

(Rear View – System)

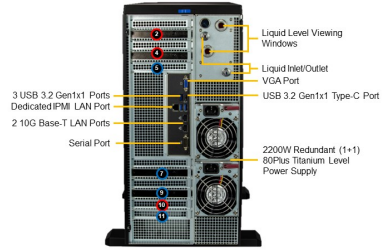

Slot	Slot Description
	PCIe 5.0 x16

CPU1 CPU2

System Cooling	Fans: 1 fan 8cm Fan(s) 2 fan 12cm Fan(s) 1 liquid cooling Fan(s) Liquid Cooling: Direct to Chip (D2C) Cold Plate (optional)
Power Supply	1x 2200W Redundant Titanium Level (96%) power supply
System BIOS	BIOS Type: AMI 32MB SPI Flash EEPROM
Management	SuperCloud Composer; Supermicro Server Manager (SSM); Supermicro Update Manager (SUM); Supermicro SuperDoctor® 5 (SD5); Super Diagnostics Offline (SDO); Supermicro Thin-Agent Service (TAS); SuperServer Automation Assistant (SAA) New!
PC Health Monitoring	CPU: Monitors for CPU Cores, Chipset Voltages, Memory 8+4 Phase-switching voltage regulator FAN: Fans with tachometer monitoring Status monitor for speed control Pulse Width Modulated (PWM) fan connectors Temperature: Monitoring for CPU and chassis environment Thermal Control for fan connectors
Dimensions and Weight	Weight: Gross Weight: 121 lbs (55 kg) Net Weight: 88 lbs (44 kg) Available Color: Black Front & Black Body
Operating Environment	Operating Temperature: 10°C ~ 25°C (50°F ~ 77°F) Non-operating Temperature: -40°C to 60°C (-40°F to 140°F) Operating Relative Humidity: 8% to 90% (non-condensing) Non-operating Relative Humidity: 5% to 95% (non-condensing)
Motherboard	<a href="#">Super X13DEG-QT</a>
Chassis	<a href="#">CSE-759TS-R2K21BP</a>