

# GPU SuperServer SYS-821GE-TNMR2

DP Intel 8U System with AMD MI300X 8-GPU and Rear I/O



## Key Applications


High Performance Computing, AI/Deep Learning Training, Industrial Automation, Retail, Healthcare, Conversational AI, Business Intelligence & Analytics, Drug Discovery, Climate and Weather Modeling, Finance & Economics,

## Key Features

- Dual Socket E (LGA-4677) 5th/4th Gen Intel® Xeon® Scalable processors up to 350W with air cooling;
- High density 8U system with AMD Instinct MI300X 8-GPU;
- Up to 32 DIMMs supporting up to 8TB DDR5-4400 in 2DPC or 4TB DDR5-5600 in 1DPC;
- Flexible networking options;
- 8 PCIe Gen 5.0 X16 LP, 2 PCIe Gen 5.0 X16 FHHL Slots, 2 PCIe Gen 5.0 X16 FHHL Slots (optional);
- 8x 2.5" Hot-swap SATA drive bays, 2x M.2 NVMe for boot drive, up to 16x 2.5" Hot-swap NVMe drive bays (12 by default + 4 optional);
- 6 Redundant 3000W Titanium Level power supplies;
- 8U Rackmount chassis with 33.2" (843mm) depth;



<b>Form Factor</b>	8U Rackmount Enclosure: 447 x 356 x 843mm (17.7" x 13.8" x 33.2") Package: 1300 x 700 x 750mm (51" x 27.6" x 29.5")
<b>Processor</b>	Dual Socket E (LGA-4677) 5th Gen Intel® Xeon® / 4th Gen Intel® Xeon® Scalable processors Up to 64C/128T; Up to 320MB Cache per CPU
<b>GPU</b>	Max GPU Count: Up to 8 onboard GPU(s) Supported GPU: AMD: Instinct MI300X Accelerators CPU-GPU Interconnect: PCIe 5.0 x16 CPU-to-GPU Interconnect GPU-GPU Interconnect: AMD Infinity Fabric™ Link
<b>System Memory</b>	Slot Count: 32 DIMM slots Max Memory (1DPC): Up to 4TB 5600MT/s ECC DDR5 RDIMM Max Memory (2DPC): Up to 8TB 4400MT/s ECC DDR5 RDIMM
<b>Drive Bays Configuration</b>	Default: Total 20 bay(s) <ul style="list-style-type: none"> <li>• 12 front hot-swap 2.5" NVMe drive bay(s)</li> <li>• 8 front hot-swap 2.5" SATA drive bay(s)</li> </ul> Option A: Total 4 bay(s) <ul style="list-style-type: none"> <li>• 4 front hot-swap 2.5" NVMe drive bay(s)</li> </ul> M.2: 2 M.2 NVMe slot(s) (M-key)
<b>Expansion Slots</b>	Default <ul style="list-style-type: none"> <li>• 8 PCIe 5.0 x16 LP slot(s)</li> <li>• 2 PCIe 5.0 x16 FHHL slot(s)</li> </ul>
<b>On-Board Devices</b>	Chipset: System on Chip Network Connectivity: 2 SFP28 25GbE with Broadcom® BCM57414 (optional) 2 RJ45 10GbE with Intel® X710-AT2 (optional)
<b>Input / Output</b>	USB: 1 USB 3.0 Type-A port(s) (Rear) Video: 1 VGA port(s)

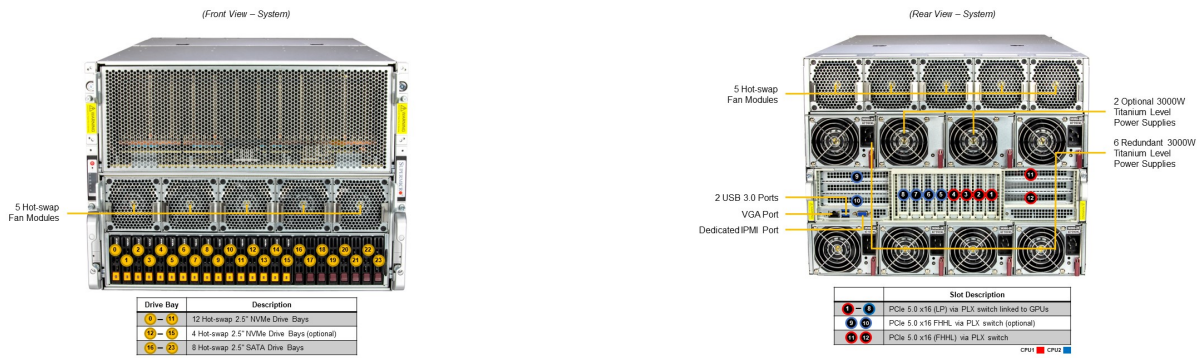

System Cooling	Fans: 10 heavy duty fans with optimal fan speed control
Power Supply	6x 3000W Redundant Titanium Level (96%) power supplies
System BIOS	BIOS Type: AMI 32MB SPI Flash EEPROM
Management	SuperCloud Composer; Supermicro Server Manager (SSM); Supermicro Update Manager (SUM); Supermicro SuperDoctor® 5 (SD5); Super Diagnostics Offline (SDO); Supermicro Thin-Agent Service (TAS); SuperServer Automation Assistant (SAA) New!
PC Health Monitoring	CPU: Monitors for CPU Cores, Chipset Voltages, Memory 8+4 Phase-switching voltage regulator FAN: Fans with tachometer monitoring Status monitor for speed control Pulse Width Modulated (PWM) fan connectors Temperature: Monitoring for CPU and chassis environment Thermal Control for fan connectors
Dimensions and Weight	Weight: Gross Weight: 178.6 lbs (81 kg) Net Weight: 116.22 lbs (53 kg) Available Color: Silver
Operating Environment	Operating Temperature: 10°C ~ 35°C (50°F ~ 95°F) Non-operating Temperature: -40°C to 60°C (-40°F to 140°F) Operating Relative Humidity: 8% to 90% (non-condensing) Non-operating Relative Humidity: 5% to 95% (non-condensing)
Motherboard	<b><a href="#">Super X13DEG-MA</a></b>
Chassis	<b>CSE-GP801TS-R000NPF-D2</b>